

dyson airblade 9kJ


Dyson backplate technical specification



**HU
03**

Front elevation

All dimensions shown in mm (+/-5 mm)
Not to scale

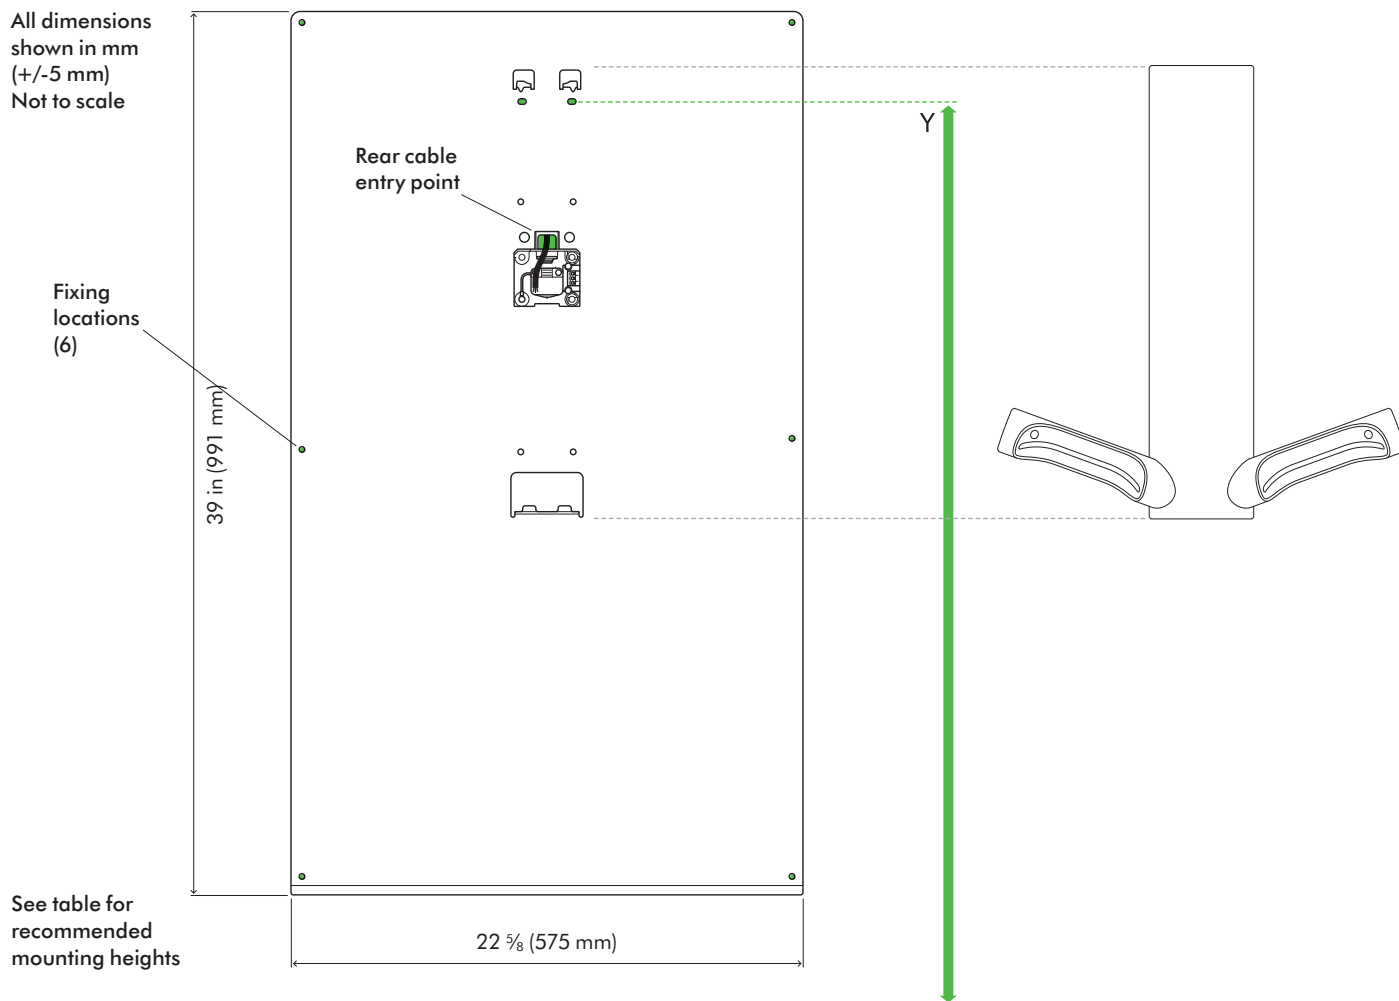

See table for recommended mounting heights

Recommended installation heights from floor

| | |
|-----------------|---------------------|
| Male | 57 1/8 in (1451 mm) |
| Female | 55 3/4 in (1416 mm) |
| Wheelchair user | 47 1/2 in (1207 mm) |
| Child 5-8 | 42 1/2 in (1079 mm) |
| Child 8-11 | 47 3/8 in (1179 mm) |
| Child 11-14 | 49 1/2 in (1256 mm) |

Dyson backplate dimensions

Height: 39 in (991 mm) x Width: 22 5/8 in (575 mm) x Depth: 3/16 in (5 mm)

Minimum clearance above machine

| | |
|--|---------------------|
| | 8 1/4 in (210 mm) |
| Rear cable entry point from floor | |
| Male | 51 in (1293 mm) |
| Female | 49 1/2 in (1258 mm) |
| Wheelchair user | 41 1/2 in (1049 mm) |
| Child 5-8 | 36 1/4 in (921 mm) |
| Child 8-11 | 40 1/8 in (1021 mm) |
| Child 11-14 | 48 1/4 in (1098 mm) |

For further information please contact Dyson
888-397-6622
airbladeinfo@dyson.com
www.dyson.com

dyson airblade 9kJ

HU
03

Installing the Dyson backplate

Where only unsupported plasterboard is available for installation, a Dyson backplate must be used. Fixing to unsupported plasterboard (drywall) without the aid of a Dyson backplate will not result in safe and secure installation for your machine, and may also invalidate your warranty.

If the wall you are fixing the machine to has an airgap, the fixings used must be of a sufficient length to provide a secure installation. Do not use sealant when attaching the machine to the wall.

The Dyson backplate helps protect the wall from water damage and can be used to cover holes/marks left from previously installed products.

Contact the Dyson Helpline for further information.

Construction

Stainless steel (brushed)

Back plate mounting bracket: Stainless steel – Brushed (304L)

Logistics

Net weight: 6.7 kg / 14.7 lbs

Packaged weight: 11.10 kg / 24.47 lbs

Packaged dimensions:

Height: 2 ¾ in (71 mm) x Width: 26 ¼ in (664 mm) x Depth: 51 in (1295 mm)

Standard warranty

5 year parts and limited labor warranty

