


## TECHNICAL SPECIFICATION




HU  
O2

REAR ELEVATION

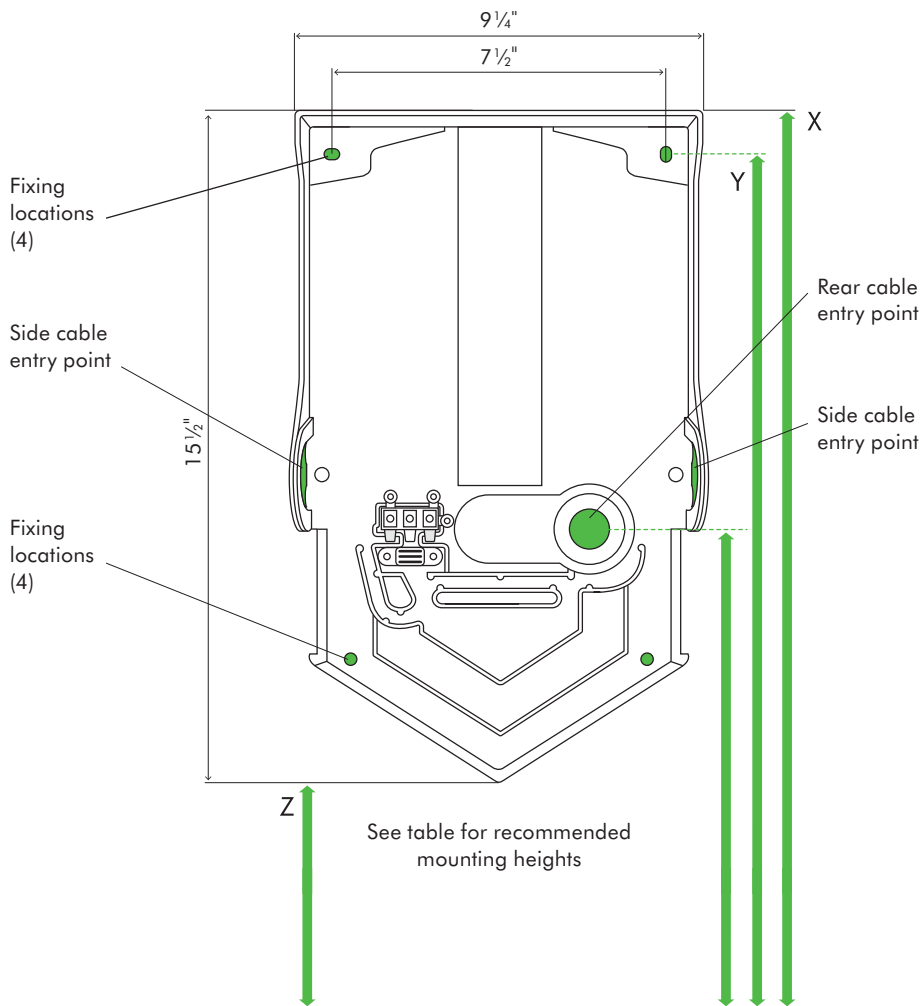

SIDE ELEVATION

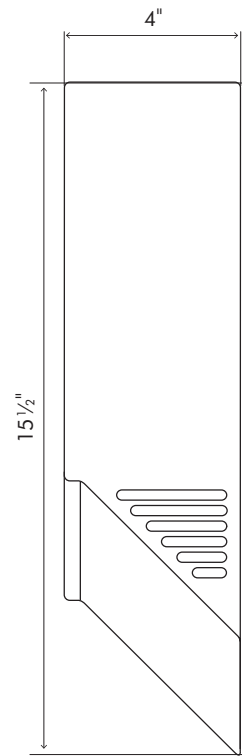

All dimensions shown in inches (+/- 3/16 inch)

FLOOR

**Recommended installation heights from floor**

Male	X 52 <sup>5</sup> / <sub>8</sub> "	Y 51 <sup>3</sup> / <sub>16</sub> "	Z 36 <sup>5</sup> / <sub>8</sub> "
Female	X 50 <sup>3</sup> / <sub>4</sub> "	Y 49 <sup>13</sup> / <sub>16</sub> "	Z 35 <sup>1</sup> / <sub>4</sub> "
Child or disabled	X 42 <sup>5</sup> / <sub>16</sub> "	Y 41 <sup>3</sup> / <sub>8</sub> "	Z 26 <sup>13</sup> / <sub>16</sub> "
Child 5-8	X 37 <sup>1</sup> / <sub>2</sub> "	Y 36 <sup>7</sup> / <sub>16</sub> "	Z 22"
Child 8-11	X 41 <sup>7</sup> / <sub>16</sub> "	Y 40 <sup>1</sup> / <sub>2</sub> "	Z 25 <sup>15</sup> / <sub>16</sub> "
Child 11-14	X 44 <sup>5</sup> / <sub>8</sub> "	Y 43 <sup>5</sup> / <sub>8</sub> "	Z 29"

**Machine dimensions**

Height 15<sup>1</sup>/<sub>2</sub>" Width 9<sup>7</sup>/<sub>32</sub>" Depth 4"

**Minimum clearance**

8<sup>1</sup>/<sub>16</sub>" clearance either side and <sup>13</sup>/<sub>16</sub>" above machine.

**Cable entry point from floor**

Male	42 <sup>7</sup> / <sub>8</sub> "
Female	41 <sup>1</sup> / <sub>2</sub> "
Child or disabled	33 <sup>3</sup> / <sub>16</sub> "
Child 5-8	28 <sup>3</sup> / <sub>4</sub> "
Child 8-11	32 <sup>3</sup> / <sub>16</sub> "
Child 11-14	35 <sup>1</sup> / <sub>4</sub> "



# dyson airblade V

HU  
O2

## Electrical

Input voltage/Frequency: 200-240 V 50&60 Hz

Standby power consumption: Less than 0.5 W

Motor specification: 1,000 W digital brushless motor

Heater type: None

## Construction

Fascia: Polycarbonate

Antibacterial coating type:

HU02 (Sprayed Nickel) contains antibacterial additive in paint.

HU02 (White) contains antibacterial moulded additive.

Can help prevent the growth of bacteria.

Back plate mounting bracket: ABS/PBT Plastic

Exterior screw type: Anti-tamper 4 mm Pin-Hex

Water ingress protection to IP24

## Filter

HEPA filter (Glass fibre and fleece prelayer)

99.97% of particles captured to the size of 0.3 microns

## Operation

Touch free capacitive sensor activation

Hand dry time measurement: 12 seconds

(Measurement based on NSF Protocol P.335)

Sound power level: 79 dB (A)

Sound pressure level @ 2 m: 63 dB(A)<sup>1</sup>

Operation lock-out period: 30 seconds

Airspeed at aperture: 690 km/h / 430 mph

Maximum altitude: 2,000 metres / 6,561 ft.

Operating temperature range: 0°C-40°C / 32°F-104°F

## Logistics

Single unit order code:

Sprayed Nickel: 307172-01, White: 307171-01

Unit barcode:

Sprayed Nickel: 885609009797, White: 885609009179

Net weight: 2.9 kg / 6.17 lbs

Packaged weight: 4.0 kg / 8.81 lbs

Packaged dimensions:

(H)145 × (W)455 × (D)274 mm / (H)5<sup>3</sup>/<sub>4</sub>" × (W)17<sup>7</sup>/<sub>8</sub>" × (D)10<sup>3</sup>/<sub>4</sub>"

## Standard warranty

5 year warranty


<sup>1</sup>Sound pressure measured at 2 m distance, in a semi-anechoic chamber.



## Product range

Sprayed Nickel

White



The Carbon label is a trademark of the Carbon Trust.

The NSF logo is the registered trademark of NSF International.

Quiet Mark is a registered trademark of the Noise Abatement Society.

Distributed By



**RESTROOMDIRECT**  
COMMERCIAL RESTROOM ACCESSORIES

WWW.RESTROOMDIRECT.COM

704-937-2673

129 Oak Park Dr., Unit A, Mooresville, NC 28115