


TECHNICAL SPECIFICATION




HU
O2

REAR ELEVATION

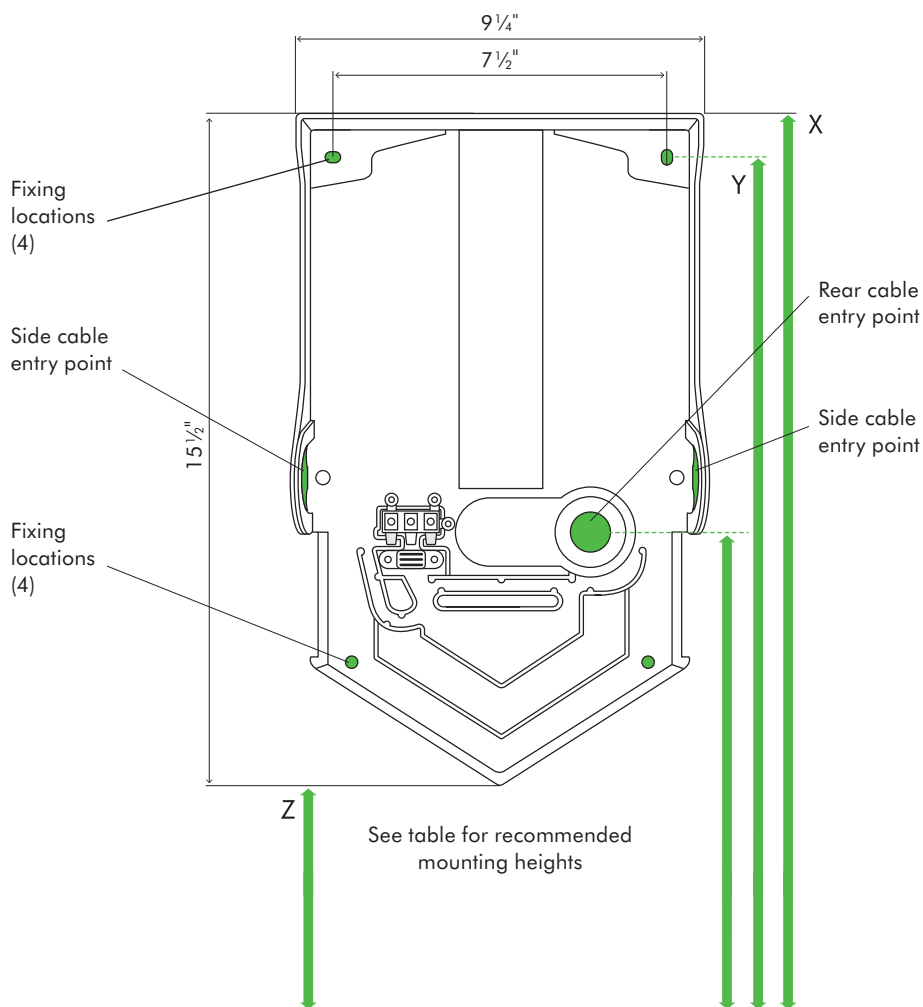

SIDE ELEVATION

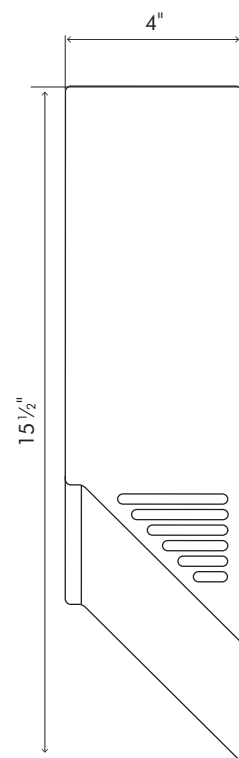

All dimensions shown in inches (+/- 3/16 inch)

FLOOR

Recommended installation heights from floor

Male	X 52 ⁵ / ₈ "	Y 51 ³ / ₁₆ "	Z 36 ⁵ / ₈ "
Female	X 50 ³ / ₄ "	Y 49 ¹³ / ₁₆ "	Z 35 ¹ / ₄ "
Child or disabled	X 42 ⁵ / ₁₆ "	Y 41 ³ / ₈ "	Z 26 ¹³ / ₁₆ "
Child 5-8	X 37 ¹ / ₂ "	Y 36 ⁷ / ₁₆ "	Z 22"
Child 8-11	X 41 ⁷ / ₁₆ "	Y 40 ¹ / ₂ "	Z 25 ¹⁵ / ₁₆ "
Child 11-14	X 44 ⁵ / ₈ "	Y 43 ⁵ / ₈ "	Z 29"

Machine dimensions

Height 15¹/₂" Width 9⁷/₃₂" Depth 4"

Minimum clearance

8¹/₁₆" clearance either side and ¹³/₁₆" above machine.

Cable entry point from floor

Male	42 ⁷ / ₈ "
Female	41 ¹ / ₂ "
Child or disabled	33 ³ / ₁₆ "
Child 5-8	28 ³ / ₄ "
Child 8-11	32 ³ / ₁₆ "
Child 11-14	35 ¹ / ₄ "



dyson airblade V

HU
O2

Electrical

Input voltage/Frequency: 120-127 V 50&60 Hz

Standby power consumption: Less than 0.5 W

Motor specification: 1,000 W digital brushless motor

Heater type: None

Construction

Fascia: Polycarbonate

Antibacterial coating type:

HU02 (Sprayed Nickel) contains antibacterial additive in paint.

HU02 (White) contains antibacterial moulded additive.

Can help prevent the growth of bacteria.

Back plate mounting bracket: ABS/PBT Plastic

Exterior screw type: Anti-tamper 4 mm Pin-Hex

Water ingress protection to IP24

Filter

HEPA filter (Glass fibre and fleece prelayer)

99.97% of particles captured to the size of 0.3 microns

Operation

Touch free capacitive sensor activation

Hand dry time measurement: 12 seconds

(Measurement based on NSF Protocol P.335)

Sound power level: 79 dB (A)

Sound pressure level @ 2 m: 63 dB(A)¹

Operation lock-out period: 30 seconds

Airspeed at aperture: 690 km/h / 430 mph

Maximum altitude: 2,000 metres / 6,561 ft.

Operating temperature range: 0°C-40°C / 32°F-104°F

Logistics

Single unit order code:

Sprayed Nickel: 307174-01, White: 307173-01

Unit barcode:

Sprayed Nickel: 885609009933, White: 885609009896

Net weight: 2.9 kg / 6.17 lbs

Packaged weight: 4.0 kg / 8.81 lbs

Packaged dimensions:

(H)145 × (W)455 × (D)274 mm / (H)5³/₄" × (W)17⁷/₈" × (D)10³/₄"

Standard warranty

5 year warranty


¹Sound pressure measured at 2 m distance, in a semi-anechoic chamber.



Product range

Sprayed Nickel

White



The Carbon label is a trademark of the Carbon Trust.

The NSF logo is the registered trademark of NSF International.

Quiet Mark is a registered trademark of the Noise Abatement Society.

Distributed By



RESTROOMDIRECT
COMMERCIAL RESTROOM ACCESSORIES

WWW.RESTROOMDIRECT.COM

704-937-2673

129 Oak Park Dr., Unit A, Mooresville, NC 28115