

# ELKAY®

## SPECIFICATIONS

WaterSentry® Plus  
Lead Reduction and  
Sediment-Taste-Odor Filter Kit  
Models EWF3000 and 51300C

### GENERAL

Lead Reduction Filter designed for use with Elkay EZH2O™ Bottle Filling Stations with visual filter monitoring.

Designed to remove lead particles and chlorine. Also reduces odors and discoloration from incoming water.

Features include Quick-Disconnect, 1/4 turn installation. Automatic inlet shut-off valve that closes when filter is removed. Hands never touch the actual filter media and, therefore, limit the potential for introduction of bacteria. Outer protective wrap. Spun Polypropylene prefilter mesh to prevent large, coarse sediment and particles from entering and clogging filter media. High-grade filter is made with activated carbon and patented ATS lead-removal media. Radial flow-thru design provides more surface area for untreated water while final filter mesh prevents loose carbon from entering water.

### DESIGN FEATURES

Size: 3-1/4" (82.6 mm) O.D. x 12-1/2" (317.5 mm) length.

Water Inlet Connection: 3/8" (9.5 mm) O.D. Tube.

Water Outlet Connection: 1/4" (6.4 mm) O.D. Tube.

### RECOMMENDED USE CONDITIONS

Filter Capacity: 3000 gal. (11356 L) or 1 year.


Maximum Flow Rate: 1.5 GPM (5.6 L/MIN.).

Water Temperature: 40-100°F (4-38°C).

Initial Pressure Drop: 2-5 PSI (14-34 KPa).

Maximum Line Pressure: 105 PSI (724 KPa).

Minimum Line Pressure: 20 PSI (138 KPa).

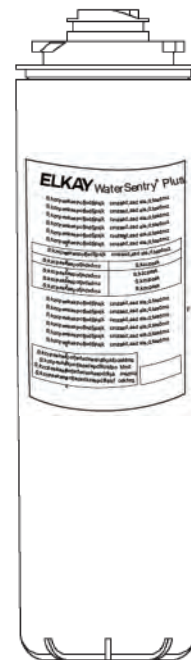

Replacement Model 51300C shown

### WARRANTY

The WaterSentry Plus is warranted to be free from defects in material and workmanship for a period of one year from date of installation. Warranty is limited to repair or replacement of defective component.

### STANDARDS

This filter has been tested to the following NSF International standards: ANSI/NSF Standard 42 Chlorine-Class 1, Particulate-Class 1, and Taste and Odor. ANSI/NSF Standard 53 for Reduction of Lead.

**EWF3000** filter installation kit is included with the the EZH2O Retro LZWSRK model and Cooler + EZH2O Kits. This model is not available for individual sale.

### AVAILABLE MODELS

**MODEL 51300C** is the single-pack WaterSentry Plus replacement filter.

**MODEL 51300C\_3PK** is the 3-pack WaterSentry Plus replacement filters.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

**WaterSentry® VII**  
**Lead Reduction and**  
**Sediment-Taste-Odor Filter Kit**  
**Model EWF3000 and 51300C**

**ELKAY®**  
**SPECIFICATIONS**

**INSTALLATION INSTRUCTIONS**

The filter must be installed in compliance with all state and local laws and regulations governing the installation and use of this product.

Disconnect electrical power and close water supply valve before proceeding.

The filter must be installed in the cold water line.


Flow indicator (arrow) on filter should point in the same direction as the water flow.

After installing new filter, open water supply valve and check for leaks. Reconnect electrical power supply. Flush system sufficiently (approximately 3 minutes) to effectively remove small residue of carbon fines.

**NOTE:** A water shutoff valve should be installed on the incoming water line to aid in future servicing of filter.

**CAUTION**

- Filter is designed to reduce lead from incoming water to levels below EPA requirements. Do not use with water that is microbiologically unsafe or with water of unknown quality without adequate disinfection before or after the system.
- Use on cold water line only. Do not allow installed filter to freeze. Do not attach hot water line to filter.
- Filter should be replaced every 3000 gallons (11,356 liters), or approximately 1 year after installation.

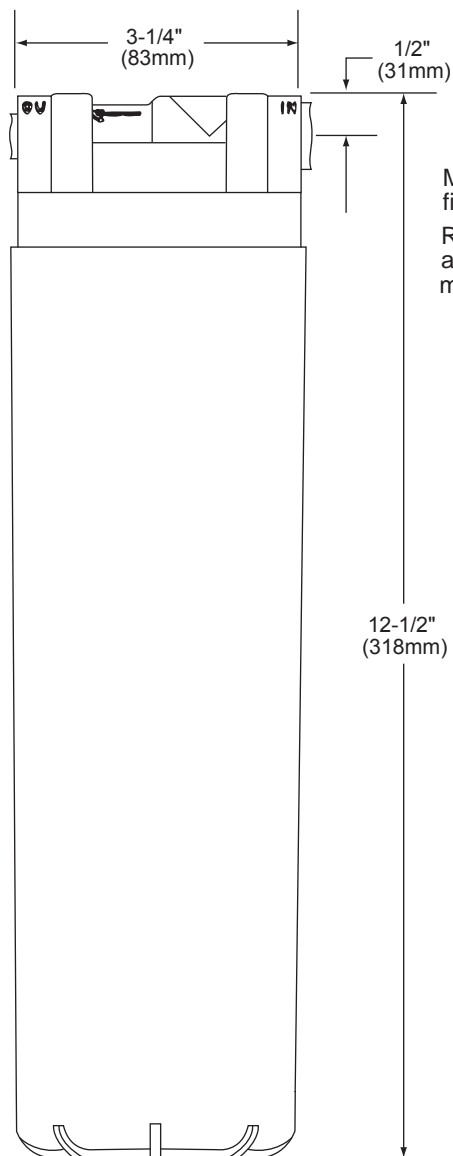

Model EWF3000 shown which includes the complete filter and bracket assembly for initial mounting. Replacement model 51300C includes the filter assembly only. Also available in a three-pack as model 51300C\_3PK.