

FASTDRY


NEW METAL



DISTRIBUTED BY

RESTROOMDIRECT
COMMERCIAL RESTROOM ACCESSORIES
restroomdirect.com 704-937-2673

HK-JA(SR)

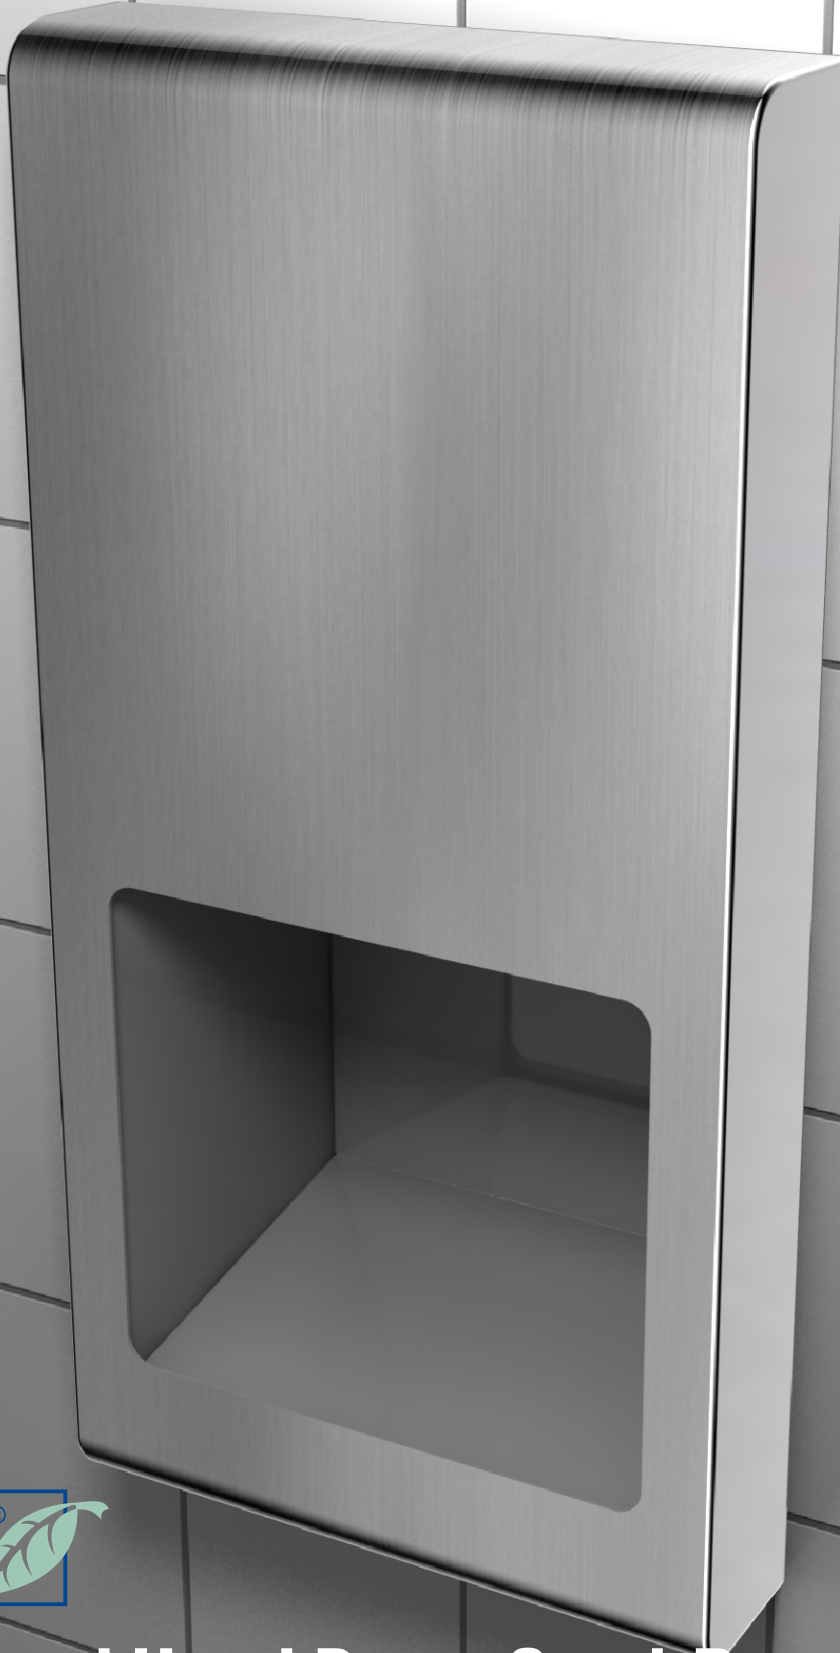

High Speed Hand Dryer Semi-Recessed Type

Certificates:



CE CB



RoHS WEEE



High Speed Hand Dryer

HK-JA(SR)

Save Power,
Save Environment,
and Save Your Money

TECHNICAL SPECIFICATIONS

ITEM CATEGORY

Operating Voltage

PERFORMANCE DATA

110-120 Vac, 50/60 Hz, 1.3-1.6 KW

220-240 Vac, 50/60 Hz, 1.3-1.6 KW

Warm Air Speed Output

75-100 m/s (169-225 mi/hr), adjustable

Motor Type

350-700W, 12000-18000 R.P.M, adjustable;

Brush Type, Dual Ball Bearings

Motor Thermal Protection

Auto Resetting Thermostat turns unit off at 105°C {221°F}

Heater Element

450-900W, adjustable

Heater Thermal Protection

Auto Resetting Thermostat turns unit off at 85°C {185°F};

Thermal fuse cut unit off at 142°C {288°F}

Drying Time

Less than 10-15 seconds

Circuit Operation

Infrared Automatic, self adjusting

Sensor Range

51 mm to 330 mm [2" to 13"], adjustable;

standard 180 mm±20 mm [7"]

Timing Protection

60 seconds auto shut off

Drip Proof

IPX1 ◆

Sound Level

78±1 dB at 1 m

Isolation

CLASS 1

Net Weight

11.6 kg [25.6 lbs]

Shipping Weight

13.2 kg [29.2 lbs]

Unit Size

250 mm W x 513 mm H x 179 mm D

[9-27/32" x 20-13/64" x 7-3/64"]

Rough Wall Opening

235 mm W x 495 mm H x 123 mm D

[9-1/4" x 19-31/64" x 4-27/32"]

CASING:

HK-JA(SR) 01 - Stainless steel; Satin finished. (t:1.5 mm)

HK-JA(SR) 02 - Stainless steel; Bright finished. (t:1.5 mm)

Patent:

USA EUROPE CHINA TAIWAN