
MODEL No:	129
ISSUED:	01-87
REVISED:	01-08

SECURITY TOWEL / CLOTHES HOOK STRIP (FRONT MOUNTING)

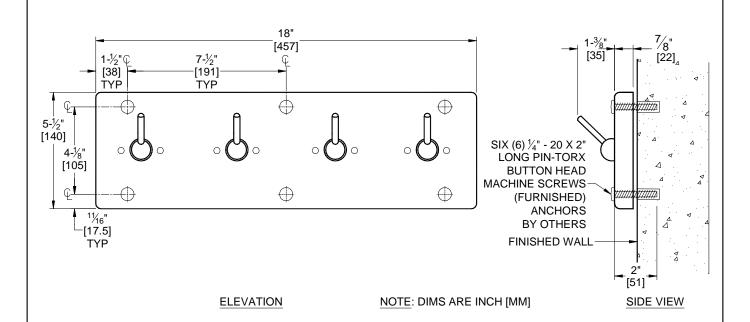

SPECIFICATION

Security Safety Towel/Clothes Hooks Strip for surface mounting shall be fabricated of type 304 stainless steel alloy 18-8. Back plate shall be 14 gauge. Clothes hooks shall be solid bar 3/8" diameter (\emptyset 10) of one-piece construction with 1" diameter (\emptyset 25) swivel trip-ball. Safety hooks shall snap down when load exceeds 35 lb (16 kg) limit. Trip-ball socket housing shall prevent hooks from being set in vertical-up position. All exposed surfaces shall have N° 4 satin finish. The unit is provided with six (6) clear mounting holes that shall accept 1/4"-20 x 2" long (M6 x 51) stainless steel pin-Torx® button head machine screws (supplied).

Security Safety Towel/Clothes Hooks Strip shall be Model № 129 of American Specialties Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913

INSTALLATION

For compliance with ADA Accessibility Guidelines, install unit so that tops of hooks are no more than 48" (1219) maximum above finished floor (MAX AFF). Surface mount unit on finished wall with six (6) 1/4"- 20×2 " long (M6 $\times 51$) pin-Torx® button head machine screws (supplied) into wall anchors (by others) through mounting holes provided.

OPERATION

Clothes/Towel hooks are tensioned to release down when overloaded beyond the 35 lb (16 kg) limit.

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS, INC.