




**AMERICAN SPECIALTIES, INC.**  
 441 Saw Mill River Road, Yonkers, NY 10701  
 (914) 476.9000 • (914) 476.0688  
 www.americanspecialties.com

**MODEL №:** 0351

**ISSUED:** 01-87

**REVISED:** 11 APR 2019

**SURFACE MOUNTED LIQUID SOAP DISPENSER**

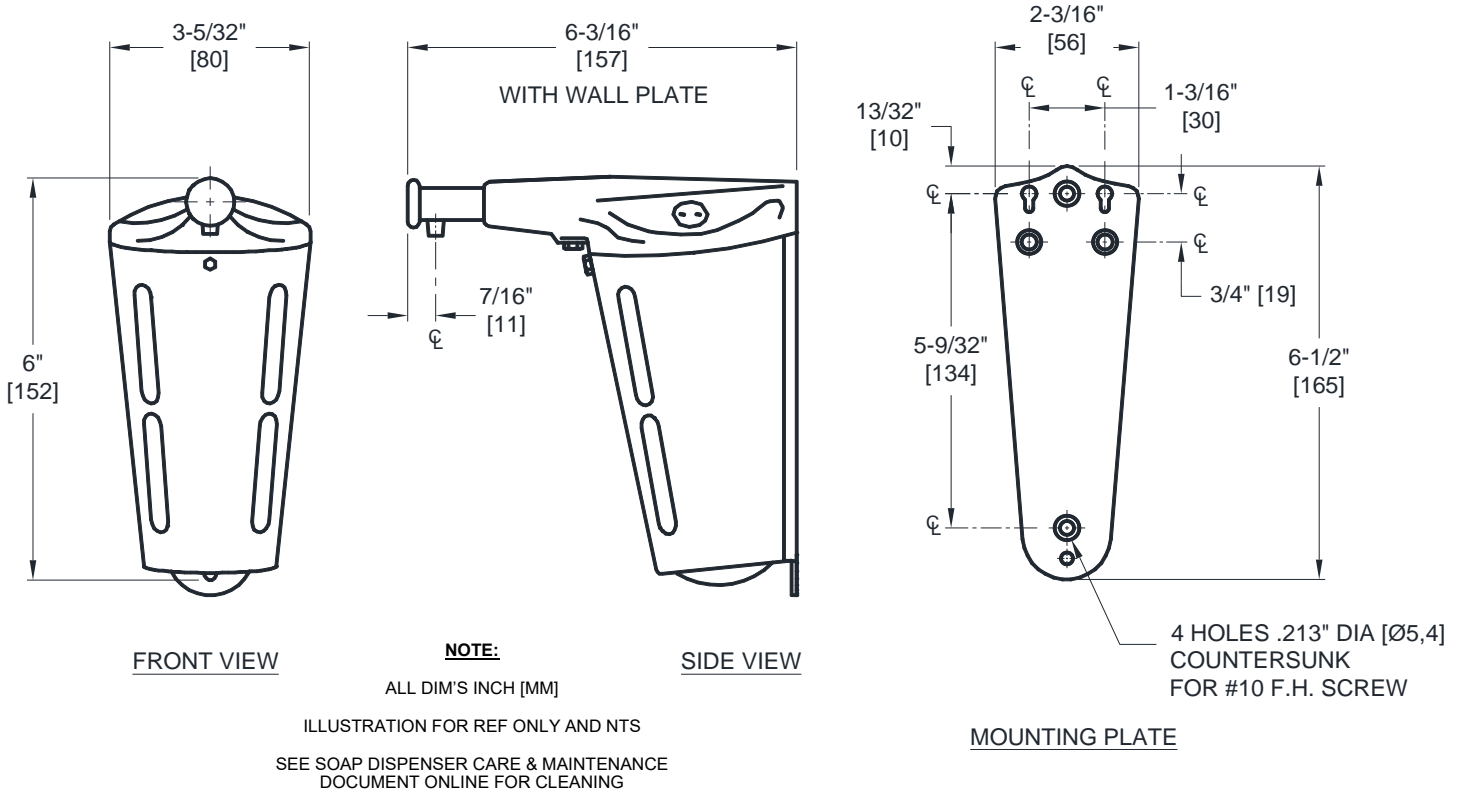

**SPECIFICATION**

Surface Mounted Liquid Soap Dispenser shall dispense 12 oz (0.4 L) of liquid soap, lotion or detergent having a pH in range  $7 \pm 1.5$  and viscosity in range 50-3500 cP (mPa•s). Soaps containing reportable salts, chlorides and alcohols should be avoided. Housing shall be type 304 stainless steel alloy 18-8. Housing shall have four (4) top to bottom viewing slots and shall hold a removable plastic globe. Filler cap shall be chrome plated die-cast Zinc and be chained to housing. Valve shall be chrome-plated brass body with stainless steel and plastic internal parts. Valve operation shall comply with 2010 ADA Accessibility Standards and ICC/ANSI A.117.1 by requiring no more than 5 lbs<sub>f</sub> (22.2 N) pressure to actuate and require no grasping or twisting by operator. All exposed metal surfaces shall be bright finish.

**Surface Mounted Liquid Soap Dispenser shall be Model № 0351 of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701-4913**

**INSTALLATION**

Secure unit to concealed tamper resistant wall plate (supplied) which is surface mounted to wall or partition using №10 pan head self-threading screws (supplied). For compliance with 2010 ADA Accessibility Standards install unit so that centerline of valve button is 48" [1219] maximum above finished floor (AFF). For general utility install unit with valve 42" [1066] AFF or 8" [203] minimum above counter top.

**OPERATION**

Soap is manually dispensed by depressing push button. Refill unit by unlocking filler cap using the service key provided. Soap will continue to feed properly until empty. Tank supply is refilled manually on cycle determined by maintenance needs.