



## HAND DRYER MEDIFLOW®

**MEDIFLOW BASIC  
WHITE EPOXY FINISH**

**Code: M03A**

### General Description


- Warm air hand dryer.
- Sensor operated by hand approximation.
- Maximum power and airflow.
- Maximum robustness and vandal-proof.
- Suitable for very high traffic facilities.
- Also in recessed version conform to ADA projection requirements.
- It normally goes along with a soap dispenser.

### Components & Materials


- Steel one-piece cover with white epoxy enamelled, 5/64" (1.9 mm) thick. Cover fixed to the base by means of 2 vandal-proof lock screws and lock with special mediflow® key wrench.
- Fire resistant plastic PPE+HIPS base and fan scroll, with 4 Ø 5/16" (8 mm) holes for wall mounting. It includes silent-blocks to dampen mechanical vibrations.
- Motor, universal with brushes, 4,500 rpm, A class, includes a temperature limiter.
- Aluminum asymmetrical double inlet fan wheel.
- Fe, Al & Cr taped winding coil filament heating element that incorporates a temperature limiter.
- IR electronic detection sensor with polycarbonate viewing window.

### Technical Specifications

|                      |                               |   |         |
|----------------------|-------------------------------|---|---------|
| Voltage              | 110-120 V                     | Total power                             | 2,250 W |
| Frequency            | 50/ 60 Hz                     | Motor power                             | 1/3 HP  |
| Electrical isolation | Grounding required            | Heating element power                   | 2,000 W |
| Dimensions           | 10-3/4"W x 12-5/8"H x 6-1/2"D | Consumption                             | 19 A    |
| Weight               | 10.7 Lbs.                     | r.p.m.                                  | 4500    |
| Effective airflow    | 265 CFM                       | Air temperature (at 4" distance / 70°F) | 120 °F  |
| Nominal airflow      | 318 CFM                       | Estimated drying time                   | 29 sec  |
| Air velocity         | 5,195 LFM                     | Noise level (at 79")                    | 65 dB   |



10-3/4"  
(272 mm)

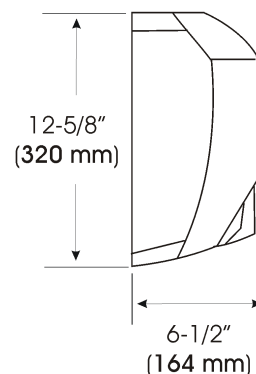

12-5/8"  
(320 mm)

6-1/2"  
(164 mm)

Dim ± 4%

### Operation

Place the hands under the air outflow valve. The dryer will start automatically, and go on with no interruption as long as the hands are kept in the detection range of the sensor. As a safety measure, the appliance will stop after 120 seconds.


### Installation

Screws are included. Please refer to [Back](#)


### Certificates & Qualifications

UL comply with UL499 norm.

### MOUNTING

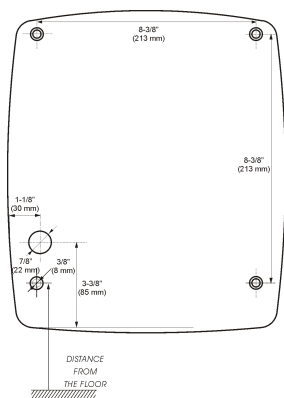

### SERIAL MOUNTING

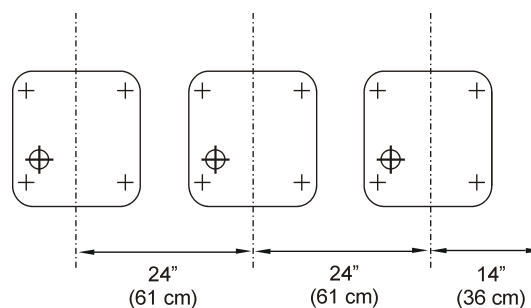


#### Nº dryers to be fitted

In toilet areas with a normal frequency of use and only one wash-basin: 1 dryer.  
 In toilet areas with a normal frequency of use and more than one wash-basin: 1 dryer for each 2 wash-basins.  
 1 row of 4 wash basins: 2 dryers; 1 row of 6 wash basins: 3 dryers; 1 row of 8 wash basins: 4 dryers.  
 In toilet areas with high traffic and more than one wash-basin: 2 dryers for each 3 wash-basins.  
 1 row of 4 wash basins: 3 dryers; 1 row of 6 wash basins: 4 dryers; 1 row of 8 wash basins: 5 dryers.

#### Ideal location

Between the wash-basin and exit. It is not recommended to install dryer between wash-basins, next to urinals, lavatories and showers. If installing automatic dryers over marble surface or ledge, the minimum distance from the dryer to the ledge must be 15-3/4. It is recommended that hand dryers be distributed throughout the washroom area to avoid overcrowding.

H = Distancia al suelo  
 H = Distance from floor  
 H = Hauteur par rapport au sol  
 H = Abstand vom Boden

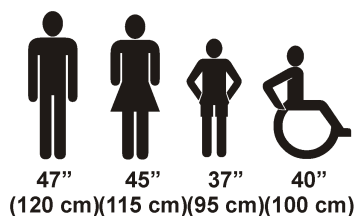

### RECOMENDED HEIGHTS DISTANCE FROM THE FLOOR

#### Specification

Surface mounted vandal resistant hand dryer shall be fabricated with one-piece 5/64" thick metal sheet cover, white epoxy enamelled. The back base shall be fire resistant plastic Noryl V0 and with 4 holes for wall mounting. The dryer shall be activated through an infrared electronic sensor and shall automatically turn off when hands are removed. Sensor shall have a polycarbonate viewing window. Motor shall be 1/3 hp, 4,500 r.p.m. , universal type, class A including a temperature limiter switch off at 248 °F (120°C. ) . The Fe, Al & Cr heating element should incorporate a thermal limiter, which will switch off by a temperature of 230 °F (110°C.). The hand dryer should have an aluminum asymmetrical double inlet fan wheel, and the fan scroll shall be made of a fire resistant plastic Noryl VO. Dryer shall deliver 318 CFM of air at 120 °F (49 °C) and 5,195 LFM velocity during user controlled drying cycle. The dryer shall have a total power of 2,250 Watts with a consumption of 19A. Noise level should be 65 dB. Overall dimensions shall be 10-3/4"W x 12-5/8"H x 6-1/2"D. Unit shall be UL listed, and /or VDE approved and CE marked.

Surface-Mounted Hand Dryer shall be Model M03A of Saniflow Corporation, 2655 Le Jeune Road Suite 810, Coral Gables, FL 33134.

**Saniflow Corp reserves the right to make changes and/or modifications to the products and their specifications without warning or notice.**